

EXHIBIT E



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y.11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

Insured: Fred Lee
Property: 39-11 27th Street
Long Island City, NY 11101

Home: (917) 399-2642

Claim Rep.: Union Mutual / Round Hill

Estimator: Anthony

Claim Number: 15405

Policy Number: 314PK-493003

Type of Loss: Fire

Date Contacted: 3/2/2020

Date of Loss: 3/2/2020

Date Inspected: 3/2/2020

Date Received: 3/2/2020

Date Entered: 3/3/2020 9:51 AM

Price List: NYOB8X_MAR20
Restoration/Service/Remodel

Estimate: 39-11-27TH_MIT-DEMO

Please make all payments payable to NY American Emergency Service LLC.



NY American Emergency Service


P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

39-11-27TH_MIT-DEMO

39-11-27TH_MIT-DEMO

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
1. Add for personal protective equipment	14.00 EA	0.00	10.15	12.43	154.53
2. Dumpster load - Approx. 30 yards, 5-7 tons of debris	1.00 EA	976.00	0.00	85.40	1,061.40
Total: 39-11-27TH_MIT-DEMO				97.83	1,215.93

2nd Floor



Living Room

Height: 9' 5"

414.94 SF Walls
572.11 SF Walls & Ceiling
17.46 SY Flooring
50.33 LF Ceil. Perimeter

157.17 SF Ceiling
157.17 SF Floor
44.92 LF Floor Perimeter

Window

2' 6" X 4' 7"

Opens into Exterior

Window

2' 6" X 4' 7"

Opens into Exterior

Door

2' 6" X 6' 8"

Opens into FRONT_RIGHT_

Missing Wall - Goes to Floor

2' 11" X 6' 8"

Opens into DINING_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
3. Clean the walls and ceiling	572.11 SF	0.00	0.35	17.52	217.76
4. Apply odor counteractant - liquid spray	157.17 SF	0.00	0.26	3.58	44.44
5. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
6. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
7. Clean floor	157.17 SF	0.00	0.39	5.36	66.66
8. Clean ceiling fan and light	1.00 EA	0.00	24.94	2.18	27.12
9. Content Manipulation charge - per hour	2.00 HR	0.00	49.02	8.58	106.62
To move contents to clean the dwelling					
10. Equipment setup, take down, and monitoring (hourly charge)	0.50 HR	0.00	59.80	2.62	32.52
11. Add for HEPA filter (for neg. air machine/vacuum - Large)	1.00 EA	0.00	242.27	21.20	263.47
12. Neg. air fan/Air scrub.-Large (per 24 hr period)-No monit.	5.00 DA	0.00	125.88	55.07	684.47




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Living Room

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
1 machine for 5 days					
Totals: Living Room				117.29	1,457.75



Kitchen

Height: 9' 5"

253.76 SF Walls	62.56 SF Ceiling
316.32 SF Walls & Ceiling	62.56 SF Floor
6.95 SY Flooring	26.67 LF Floor Perimeter
31.67 LF Ceil. Perimeter	

Window

3' 5" X 3' 3"

Opens into Exterior

Missing Wall - Goes to Floor

5' X 6' 8"


Opens into DINING_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
13. Clean range hood	1.00 EA	0.00	16.26	1.42	17.68
14. Apply odor counteractant - liquid spray	62.56 SF	0.00	0.26	1.42	17.69
15. Clean floor - tile	62.56 SF	0.00	0.56	3.07	38.10
16. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
17. Clean range - interior and exterior	1.00 EA	0.00	40.90	3.58	44.48
18. Clean countertop	20.00 SF	0.00	0.71	1.24	15.44
19. Clean the walls and ceiling	316.32 SF	0.00	0.35	9.69	120.40
20. Clean cabinetry - lower - inside and out	10.00 LF	0.00	14.13	12.36	153.66
21. Clean cabinetry - upper - inside and out	11.00 LF	0.00	14.13	13.60	169.03
22. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
23. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
24. Content Manipulation charge - per hour	2.00 HR	0.00	49.02	8.58	106.62
To move contents to clean the dwelling					
Totals: Kitchen				57.75	717.82



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Dining Room

Height: 9' 5"

223.63 SF Walls
290.61 SF Walls & Ceiling
7.44 SY Flooring
32.83 LF Ceil. Perimeter

66.99 SF Ceiling
66.99 SF Floor
20.00 LF Floor Perimeter

Door

2' X 6' 8"

Opens into CLOSET_1

Missing Wall - Goes to Floor

2' 11" X 6' 8"

Opens into HALLWAY

Missing Wall - Goes to Floor

5' X 6' 8"

Opens into KITCHEN


Missing Wall - Goes to Floor

2' 11" X 6' 8"

Opens into LIVING_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
25. Clean the walls and ceiling	290.61 SF	0.00	0.35	8.90	110.61
26. Apply odor counteractant - liquid spray	66.99 SF	0.00	0.26	1.52	18.94
27. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
28. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
29. Clean floor	66.99 SF	0.00	0.39	2.29	28.42
30. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
31. Clean radiator cover	1.00 EA	0.00	11.61	1.02	12.63
32. Clean radiator unit	1.00 EA	0.00	33.77	2.95	36.72
33. Content Manipulation charge - per hour	1.00 HR	0.00	49.02	4.29	53.31
To move contents to clean the dwelling					

Totals: Dining Room 23.04 286.38



Closet 1

Height: 9' 5"

79.14 SF Walls
86.26 SF Walls & Ceiling
0.79 SY Flooring
11.00 LF Ceil. Perimeter

7.12 SF Ceiling
7.12 SF Floor
7.33 LF Floor Perimeter

Missing Wall - Goes to Floor

1' 8" X 6' 8"

Opens into FRONT_RIGHT_

Door

2' X 6' 8"

Opens into DINING_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Closet 1

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
34. Clean the walls and ceiling	86.26 SF	0.00	0.35	2.64	32.83
35. Clean floor	7.12 SF	0.00	0.39	0.24	3.02
36. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
37. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
38. Apply odor counteractant - liquid spray	7.12 SF	0.00	0.26	0.16	2.01
Totals: Closet 1				4.22	52.55



Hallway

Height: 9' 5"

54.74 SF Walls	10.25 SF Ceiling
64.99 SF Walls & Ceiling	10.25 SF Floor
1.14 SY Flooring	2.92 LF Floor Perimeter
12.83 LF Ceil. Perimeter	

Door	2' X 6' 8"	Opens into BATHROOM
Door	2' 6" X 6' 8"	Opens into REAR_LEFT_BE
Missing Wall - Goes to Floor	2' 11" X 6' 8"	Opens into DINING_ROOM
Door	2' 6" X 6' 8"	Opens into LANDING


DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
39. Clean the walls and ceiling	64.99 SF	0.00	0.35	1.99	24.74
40. Apply odor counteractant - liquid spray	10.25 SF	0.00	0.26	0.23	2.90
41. Clean door - with detail (per side)	3.00 EA	0.00	10.32	2.71	33.67
42. Clean door hardware	1.50 EA	0.00	6.38	0.84	10.41
43. Clean floor	10.25 SF	0.00	0.39	0.35	4.35
44. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
45. Mask and prep for paint - plastic, paper, tape (per SF)	10.25 SF	0.00	1.41	1.26	15.71

Preparations for Spray and Seal -

To protect the floor

Totals: Hallway				8.27	102.84
-----------------	--	--	--	------	--------

P.O.Box 140481 Station B
Jamaica N.Y.11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Height: 9' 5"

325.44 SF Walls	130.33 SF Ceiling
455.78 SF Walls & Ceiling	130.33 SF Floor
14.48 SY Flooring	33.42 LF Floor Perimeter
45.67 LF Ceil. Perimeter	

Door	2' X 6' 8"	Opens into CLOSET_4
Door	3' 11" X 6' 8"	Opens into CLOSET_3
Door	2' X 6' 8"	Opens into CLOSET_2
Door	2' 6" X 6' 8"	Opens into HALLWAY
Door	1' 10" X 6' 8"	Opens into BATHROOM
Window	2' 6" X 4' 7"	Opens into Exterior
Window	2' 6" X 4' 7"	Opens into Exterior

39-11-27TH MIT-DEMO



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com


CONTINUED - Rear Left Bedroom

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
59. Mask and prep for paint - plastic, paper, tape (per SF)	160.33 SF	0.00	1.41	19.78	245.85

Preparations for Spray and Seal -

To cover the floor and the windows to prevent any kind of over spray that would damage the exterior facade.

Totals: Rear Left Bedroom				251.02	3,119.59
---------------------------	--	--	--	--------	----------



Closet 2

Height: 9' 5"


76.13 SF Walls	5.35 SF Ceiling
81.47 SF Walls & Ceiling	5.35 SF Floor
0.59 SY Flooring	7.50 LF Floor Perimeter
9.50 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
60. Tear out wet drywall, cleanup, bag for disposal	81.47 SF	0.99	0.00	7.06	87.72
61. Tear out and bag wet insulation	5.35 SF	0.81	0.00	0.38	4.71
62. Clean stud wall	76.13 SF	0.00	0.73	4.86	60.43
63. Clean floor or roof joist system	5.35 SF	0.00	0.92	0.43	5.35
64. Seal floor or ceiling joist system (shellac)	5.35 SF	0.00	1.40	0.66	8.15
65. Seal stud wall for odor control (shellac)	76.13 SF	0.00	1.03	6.86	85.27
66. HEPA Vacuuming - Detailed - (PER SF)	81.47 SF	0.00	0.67	4.78	59.36
67. Apply anti-microbial agent to more than the walls and ceiling	86.82 SF	0.00	0.27	2.05	25.49
68. Remove Door opening (jamb & casing) - up to 32" wide - paint grade	1.00 EA	8.18	0.00	0.72	8.90
69. Remove Interior door unit	1.00 EA	24.38	0.00	2.13	26.51
Totals: Closet 2				29.93	371.89



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com




Closet 3

Height: 9' 5"

104.15 SF Walls	9.32 SF Ceiling
113.47 SF Walls & Ceiling	9.32 SF Floor
1.04 SY Flooring	9.92 LF Floor Perimeter
13.83 LF Ceil. Perimeter	

Door	3' 11" X 6' 8"	Opens into REAR_LEFT_BE			
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
70. Tear out wet drywall, cleanup, bag for disposal	113.47 SF	0.99	0.00	9.83	122.17
71. Tear out and bag wet insulation	9.32 SF	0.81	0.00	0.66	8.21
72. Clean stud wall	104.15 SF	0.00	0.73	6.65	82.68
73. Clean floor or roof joist system	9.32 SF	0.00	0.92	0.75	9.32
74. Seal floor or ceiling joist system (shellac)	9.32 SF	0.00	1.40	1.14	14.19
75. Seal stud wall for odor control (shellac)	104.15 SF	0.00	1.03	9.39	116.66
76. HEPA Vacuuming - Detailed - (PER SF)	113.47 SF	0.00	0.67	6.65	82.67
77. Apply anti-microbial agent to more than the walls and ceiling	122.79 SF	0.00	0.27	2.90	36.05
78. Remove Door opening (jamb & casing) - up to 32" wide - paint grade	1.00 EA	8.18	0.00	0.72	8.90
79. Remove Interior door unit	1.00 EA	24.38	0.00	2.13	26.51
Totals: Closet 3				40.82	507.36



Closet 4

Height: 9' 5"

71.42 SF Walls	4.89 SF Ceiling
76.31 SF Walls & Ceiling	4.89 SF Floor
0.54 SY Flooring	7.00 LF Floor Perimeter
9.00 LF Ceil. Perimeter	

Door	2' X 6' 8"	Opens into REAR_LEFT_BE			
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
80. Tear out wet drywall, cleanup, bag for disposal	76.31 SF	0.99	0.00	6.61	82.16



NY American Emergency Service


P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Closet 4

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
81. Tear out and bag wet insulation	4.89 SF	0.81	0.00	0.35	4.31
82. Clean stud wall	71.42 SF	0.00	0.73	4.56	56.70
83. Clean floor or roof joist system	4.89 SF	0.00	0.92	0.39	4.89
84. Seal floor or ceiling joist system (shellac)	4.89 SF	0.00	1.40	0.60	7.45
85. Seal stud wall for odor control (shellac)	71.42 SF	0.00	1.03	6.44	80.00
86. HEPA Vacuuming - Detailed - (PER SF)	76.31 SF	0.00	0.67	4.47	55.60
87. Apply anti-microbial agent to more than the walls and ceiling	81.19 SF	0.00	0.27	1.92	23.84
88. Remove Door opening (jamb & casing) - up to 32" wide - paint grade	1.00 EA	8.18	0.00	0.72	8.90
89. Remove Interior door unit	1.00 EA	24.38	0.00	2.13	26.51

Totals: Closet 4

28.19 350.36



Bathroom

Height: 9' 5"

238.49 SF Walls	49.78 SF Ceiling
288.26 SF Walls & Ceiling	49.78 SF Floor
5.53 SY Flooring	24.67 LF Floor Perimeter
29.83 LF Ceil. Perimeter	

Window	1' 4" X 3'	Opens into Exterior
Door	1' 4" X 6' 8"	Opens into CLOSET_5
Door	1' 10" X 6' 8"	Opens into REAR_LEFT_BE
Door	2' X 6' 8"	Opens into HALLWAY
Window	1' 4" X 3'	Opens into Exterior

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
90. Clean part of the walls	169.02 SF	0.00	0.35	5.18	64.34
91. Apply odor counteractant - liquid spray	49.78 SF	0.00	0.26	1.13	14.07
92. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
93. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
94. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06




NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y. 11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

CONTINUED - Bathroom

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
95. Clean ceramic tile	119.24 SF	0.00	0.51	5.32	66.13
96. Clean bath accessory	2.00 EA	0.00	6.82	1.19	14.83
97. Clean bathroom fixtures	1.00 EA	0.00	81.32	7.12	88.44
98. Clean floor - tile	49.78 SF	0.00	0.56	2.44	30.32
99. Clean toilet seat	1.00 EA	0.00	4.53	0.40	4.93
100. Clean vanity - inside and out	2.00 LF	0.00	12.67	2.22	27.56
101. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
102. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
103. Clean medicine cabinet	1.00 EA	0.00	13.50	1.18	14.68
104. Clean radiator cover	1.00 EA	0.00	11.61	1.02	12.63
105. Clean radiator unit	1.00 EA	0.00	33.77	2.95	36.72
Totals: Bathroom				34.12	424.06



Closet 5

Height: 9' 5"


68.01 SF Walls	4.08 SF Ceiling
72.10 SF Walls & Ceiling	4.08 SF Floor
0.45 SY Flooring	6.83 LF Floor Perimeter
8.17 LF Ceil. Perimeter	

Door	1' 4" X 6' 8"	Opens into BATHROOM			
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
106. Clean the walls and ceiling	72.10 SF	0.00	0.35	2.21	27.45
107. Clean floor	4.08 SF	0.00	0.39	0.14	1.73
108. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
109. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
110. Apply odor counteractant - liquid spray	4.08 SF	0.00	0.26	0.09	1.15
Totals: Closet 5				3.62	45.02



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Landing

Height: 9' 5"

115.17 SF Walls	17.15 SF Ceiling
132.32 SF Walls & Ceiling	17.15 SF Floor
1.91 SY Flooring	11.50 LF Floor Perimeter
14.00 LF Ceil. Perimeter	

Door

2' 6" X 6' 8"

Opens into HALLWAY

Missing Wall

3' 2" X 9' 5"


Opens into STAIRWAY

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
111. Clean the walls and ceiling	132.32 SF	0.00	0.35	4.05	50.36
112. Apply odor counteractant - liquid spray	17.15 SF	0.00	0.26	0.39	4.85
113. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
114. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
115. Clean floor	17.15 SF	0.00	0.39	0.59	7.28
116. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
117. Mask and prep for paint - plastic, paper, tape (per SF)	17.15 SF	0.00	1.41	2.12	26.30

Preparations for Spray and Seal -

To protect the floor

Totals: Landing				9.22	114.54
-----------------	--	--	--	------	--------



Stairway

Height: 9' 5"

178.92 SF Walls	25.07 SF Ceiling
203.99 SF Walls & Ceiling	25.07 SF Floor
2.79 SY Flooring	19.00 LF Floor Perimeter
19.00 LF Ceil. Perimeter	

Missing Wall

3' 2" X 9' 5"

Opens into LANDING

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
118. Clean the walls and ceiling	203.99 SF	0.00	0.35	6.25	77.65
119. Apply odor counteractant - liquid spray	25.07 SF	0.00	0.26	0.57	7.09




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Stairway

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
Totals: Stairway				6.82	84.74
Total: 2nd Floor				614.31	7,634.90

1st Floor



Entry

Height: 10' 2"


179.08 SF Walls	25.63 SF Ceiling
204.71 SF Walls & Ceiling	25.63 SF Floor
2.85 SY Flooring	15.75 LF Floor Perimeter
21.17 LF Ceil. Perimeter	

Door	2' 11" X 6' 8"		Opens into Exterior		
Door	2' 6" X 6' 8"		Opens into DEF_1ST_FLOO		
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
120. Clean the walls and ceiling	204.71 SF	0.00	0.35	6.27	77.92
121. Apply odor counteractant - liquid spray	25.63 SF	0.00	0.26	0.58	7.24
122. Clean door - with detail (per side)	2.00 EA	0.00	10.32	1.81	22.45
123. Clean door hardware	1.00 EA	0.00	6.38	0.56	6.94
124. Clean floor	25.63 SF	0.00	0.39	0.88	10.88
125. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
126. Mask and prep for paint - plastic, paper, tape (per SF)	25.63 SF	0.00	1.41	3.16	39.30
Preparations for Spray and Seal -					
To protect the floor					
Totals: Entry				14.15	175.79



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



1st Floor Common Hallway

Height: 10' 2"

199.00 SF Walls	41.47 SF Ceiling
240.48 SF Walls & Ceiling	41.47 SF Floor
4.61 SY Flooring	23.25 LF Floor Perimeter
28.25 LF Ceil. Perimeter	


Door	2' 6" X 6' 8"	Opens into LIVING_ROOM
Door	2' 6" X 6' 8"	Opens into ENTRY
Missing Wall	2' 9" X 10' 2"	Opens into STAIRS
Missing Wall	6" X 10' 2"	Opens into STAIRS

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
127. Clean the walls and ceiling	240.48 SF	0.00	0.35	7.36	91.53
128. Apply odor counteractant - liquid spray	41.47 SF	0.00	0.26	0.94	11.72
129. Clean door - with detail (per side)	2.00 EA	0.00	10.32	1.81	22.45
130. Clean door hardware	1.00 EA	0.00	6.38	0.56	6.94
131. Clean floor	41.47 SF	0.00	0.39	1.41	17.58
132. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
133. Clean radiator unit	1.00 EA	0.00	33.77	2.95	36.72
134. Mask and prep for paint - plastic, paper, tape (per SF)	41.47 SF	0.00	1.41	5.12	63.59

Preparations for Spray and Seal -

To protect the floor

Totals: 1st Floor Common Hallway				21.04	261.59
----------------------------------	--	--	--	-------	--------



Stairs

Height: 10' 2"

6.40 SF Walls	1.83 SF Ceiling
8.24 SF Walls & Ceiling	5.04 SF Floor
0.56 SY Flooring	0.87 LF Floor Perimeter
0.67 LF Ceil. Perimeter	


Missing Wall	2' 9" X 10' 2"	Opens into DEF_1ST_FLOO
Missing Wall	6" X 10' 2"	Opens into DEF_1ST_FLOO



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Stairs



Subroom: Stairs1 (1)

Height: 9' 1"

49.73 SF Walls	7.56 SF Ceiling
57.29 SF Walls & Ceiling	7.56 SF Floor
0.84 SY Flooring	5.50 LF Floor Perimeter
5.50 LF Ceil. Perimeter	

Missing Wall


2' 9" X 9' 1/2"

Opens into STAIRS

Missing Wall

2' 7" X 9' 1/2"

Opens into STAIRS2



Subroom: Stairs2 (2)

Height: 9' 1"

54.87 SF Walls	23.47 SF Ceiling
78.34 SF Walls & Ceiling	46.73 SF Floor
5.19 SY Flooring	10.58 LF Floor Perimeter
9.08 LF Ceil. Perimeter	

Missing Wall

2' 7" X 9' 1/2"

Opens into STAIRS1

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
135. Clean the walls and ceiling	143.86 SF	0.00	0.35	4.41	54.76
136. Clean balustrade	16.00 LF	0.00	2.52	3.53	43.85
137. Apply odor counteractant - liquid spray	59.33 SF	0.00	0.26	1.35	16.78
138. Clean stair riser - per side - per LF	48.00 LF	0.00	0.53	2.23	27.67
139. Clean stair stringer - per side	32.00 LF	0.00	0.85	2.38	29.58
140. Clean stair tread - per side - per LF	48.00 LF	0.00	0.63	2.65	32.89
141. Mask and prep for paint - plastic, paper, tape (per SF)	59.33 SF	0.00	1.41	7.32	90.98

Preparations for Spray and Seal -


To protect the floor

Totals: Stairs				23.87	296.51
----------------	--	--	--	-------	--------



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Living Room

Height: 8' 10"

462.57 SF Walls
697.74 SF Walls & Ceiling
26.13 SY Flooring
61.67 LF Ceil. Perimeter

235.17 SF Ceiling
235.17 SF Floor
54.50 LF Floor Perimeter


Window	2' 6" X 4' 7"	Opens into Exterior
Window	2' 6" X 4' 7"	Opens into Exterior
Window	2' 6" X 4' 7"	Opens into Exterior
Door	2' 6" X 6' 8"	Opens into DEF_1ST_FLOO
Door	2' X 6' 8"	Opens into CLOSET_1
Missing Wall - Goes to Floor	2' 8" X 6' 8"	Opens into HALLWAY

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
142. Clean the walls and ceiling	697.74 SF	0.00	0.35	21.37	265.58
143. Apply odor counteractant - liquid spray	235.17 SF	0.00	0.26	5.35	66.49
144. Clean door - with detail (per side)	2.00 EA	0.00	10.32	1.81	22.45
145. Clean door hardware	1.00 EA	0.00	6.38	0.56	6.94
146. Clean floor	235.17 SF	0.00	0.39	8.03	99.75
147. Clean window unit (per side) 10 - 20 SF	3.00 EA	0.00	14.46	3.80	47.18
148. Clean window blind - horizontal or vertical	36.00 SF	0.00	1.24	3.91	48.55
149. Content Manipulation charge - per hour	2.00 HR	0.00	49.02	8.58	106.62
To move contents to clean the dwelling					
150. Equipment setup, take down, and monitoring (hourly charge)	0.50 HR	0.00	59.80	2.62	32.52
151. Add for HEPA filter (for neg. air machine/vacuum - Large)	1.00 EA	0.00	242.27	21.20	263.47
152. Neg. air fan/Air scrub.-Large (per 24 hr period)-No monit. 1 machine for 5 days	5.00 DA	0.00	125.88	55.07	684.47
Totals: Living Room				132.30	1,644.02



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com




Closet 1

Height: 8' 10"

60.28 SF Walls
64.17 SF Walls & Ceiling
0.43 SY Flooring
8.33 LF Ceil. Perimeter

3.90 SF Ceiling
3.90 SF Floor
6.33 LF Floor Perimeter

Door		2' X 6' 8"		Opens into LIVING_ROOM		
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL	
153. Clean the walls and ceiling	64.17 SF	0.00	0.35	1.97	24.43	
154. Clean floor	3.90 SF	0.00	0.39	0.13	1.65	
155. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47	
156. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22	
157. Apply odor counteractant - liquid spray	3.90 SF	0.00	0.26	0.09	1.10	
Totals: Closet 1				3.37	41.87	



Front bedroom

Height: 8' 10"

400.29 SF Walls
544.93 SF Walls & Ceiling
16.07 SY Flooring
48.50 LF Ceil. Perimeter

144.64 SF Ceiling
144.64 SF Floor
46.00 LF Floor Perimeter

Window		2' 6" X 4' 7"		Opens into Exterior		
Door		2' 6" X 6' 8"		Opens into HALLWAY		
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL	
158. Tear out wet drywall, cleanup, bag for disposal	144.64 SF	0.99	0.00	12.53	155.72	
159. Clean floor or roof joist system	144.64 SF	0.00	0.92	11.64	144.71	
160. Seal floor or ceiling joist system (shellac)	144.64 SF	0.00	1.40	17.72	220.22	
161. HEPA Vacuuming - Detailed - (PER SF)	144.64 SF	0.00	0.67	8.48	105.39	
162. Apply anti-microbial agent to more than the ceiling	289.28 SF	0.00	0.27	6.83	84.94	
163. Clean the walls	400.29 SF	0.00	0.35	12.26	152.36	




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Front bedroom

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
164. Clean window blind - horizontal or vertical	12.00 SF	0.00	1.24	1.30	16.18
165. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
166. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
167. Clean floor	144.64 SF	0.00	0.39	4.94	61.35
168. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
169. Clean window unit (per side) 10 - 20 SF	1.00 EA	0.00	14.46	1.27	15.73
170. Mask and prep for paint - plastic, paper, tape (per SF)	180.64 SF	0.00	1.41	22.29	276.99
Preparations for Spray and Seal -					
<i>To cover the floor and seal off the entry way and the windows to prevent any kind of over spray that would damage the exterior facade.</i>					
171. Equipment setup, take down, and monitoring (hourly charge)	1.00 HR	0.00	58.09	5.08	63.17
172. Dehumidifier (per 24 hour period) - No monitoring	5.00 EA	0.00	51.63	22.59	280.74
<i>1 machine for 5 days</i>					
173. Air mover (per 24 hour period) - No monitoring	5.00 EA	0.00	26.75	11.70	145.45
<i>1 machine for 5 days</i>					
Totals: Front bedroom				140.70	1,748.70



Hallway

Height: 8' 10"

211.86 SF Walls	39.86 SF Ceiling
251.72 SF Walls & Ceiling	39.86 SF Floor
4.43 SY Flooring	21.00 LF Floor Perimeter
33.17 LF Ceil. Perimeter	

Door	2' X 6' 8"	Opens into BATHROOM
Missing Wall - Goes to Floor	2' 6" X 6' 8"	Opens into KITCHEN
Door	2' 6" X 6' 8"	Opens into REAR_LEFT_BE
Door	2' 6" X 6' 8"	Opens into FRONT_BEDROO
Missing Wall - Goes to Floor	2' 8" X 6' 8"	Opens into LIVING_ROOM

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
-------------	-----	--------	---------	-----	-------




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Hallway

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
174. Clean the walls and ceiling	251.72 SF	0.00	0.35	7.71	95.81
175. Apply odor counteractant - liquid spray	39.86 SF	0.00	0.26	0.91	11.27
176. Clean door - with detail (per side)	3.00 EA	0.00	10.32	2.71	33.67
177. Clean door hardware	1.50 EA	0.00	6.38	0.84	10.41
178. Clean floor	39.86 SF	0.00	0.39	1.36	16.91
179. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
180. Mask and prep for paint - plastic, paper, tape (per SF)	39.86 SF	0.00	1.41	4.92	61.12
Preparations for Spray and Seal -					
<i>To protect the floor</i>					
181. Equipment setup, take down, and monitoring (hourly charge)	0.50 HR	0.00	59.80	2.62	32.52
182. Air mover (per 24 hour period) - No monitoring	5.00 EA	0.00	26.75	11.70	145.45
1 machine for 5 days					
Totals: Hallway				33.66	418.22



Bathroom

Height: 8' 10"

176.75 SF Walls	28.28 SF Ceiling
205.03 SF Walls & Ceiling	28.28 SF Floor
3.14 SY Flooring	20.50 LF Floor Perimeter
22.50 LF Ceil. Perimeter	

Door	2' X 6' 8"	Opens into HALLWAY			
Window	1' 7" X 2' 10"	Opens into Exterior			
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
183. Clean the walls and ceiling	205.03 SF	0.00	0.35	6.28	78.04
184. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
185. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
186. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
187. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
188. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Bathroom

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
189. Apply odor counteractant - liquid spray	28.28 SF	0.00	0.26	0.64	7.99
190. Clean bath accessory	2.00 EA	0.00	6.82	1.19	14.83
191. Clean bathroom fixtures	1.00 EA	0.00	81.32	7.12	88.44
192. Clean floor - tile	28.28 SF	0.00	0.56	1.39	17.23
193. Clean toilet seat	1.00 EA	0.00	4.53	0.40	4.93
194. Clean ceramic tile	88.37 SF	0.00	0.51	3.94	49.01
195. Clean medicine cabinet	1.00 EA	0.00	13.50	1.18	14.68
Totals: Bathroom				26.11	324.56



Kitchen

Height: 8' 10"

264.06 SF Walls	68.33 SF Ceiling
332.39 SF Walls & Ceiling	68.33 SF Floor
7.59 SY Flooring	28.67 LF Floor Perimeter
33.67 LF Ceil. Perimeter	

Door	2' 6" X 6' 8"		Opens into Exterior		
Missing Wall - Goes to Floor	2' 6" X 6' 8"		Opens into HALLWAY		
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
196. Tear out wet drywall, cleanup, bag for disposal	156.67 SF	0.99	0.00	13.57	168.67
197. Clean stud wall	88.33 SF	0.00	0.73	5.64	70.12
198. Clean floor or roof joist system	68.33 SF	0.00	0.92	5.50	68.36
199. Seal floor or ceiling joist system (shellac)	68.33 SF	0.00	1.40	8.37	104.03
200. Seal stud wall for odor control (shellac)	88.33 SF	0.00	1.03	7.96	98.94
201. HEPA Vacuuming - Detailed - (PER SF)	156.67 SF	0.00	0.67	9.18	114.15
202. Apply anti-microbial agent to more than the ceiling	225.00 SF	0.00	0.27	5.32	66.07
203. Clean floor - tile	68.33 SF	0.00	0.56	3.35	41.61
204. Clean window unit (per side) 10 - 20 SF	1.00 EA	0.00	14.46	1.27	15.73
205. Clean range - interior and exterior	1.00 EA	0.00	40.90	3.58	44.48



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y. 11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com


CONTINUED - Kitchen

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
206. Clean countertop	20.00 SF	0.00	0.71	1.24	15.44
207. Clean part of the walls	175.76 SF	0.00	0.35	5.38	66.90
208. Clean cabinetry - lower - inside and out	10.00 LF	0.00	14.13	12.36	153.66
209. Clean cabinetry - upper - inside and out	5.00 LF	0.00	14.13	6.18	76.83
210. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
211. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
212. Clean radiator unit	1.00 EA	0.00	33.77	2.95	36.72
213. Content Manipulation charge - per hour	1.00 HR	0.00	49.01	4.29	53.30
<i>To move and replace contents for removal of ceiling and attached outside window wall and cleaning of all non affected areas</i>					
214. Mask and prep for paint - plastic, paper, tape (per SF)	229.33 SF	0.00	1.41	28.29	351.65
Preparations for Spray and Seal -					
<i>To protect the floor and the kitchen cabinets from the removal of the ceiling and attached outside window wall</i>					
<i>To cover the windows and the rear entry to prevent any kind of over spray that would damage the exterior facade.</i>					
215. Equipment setup, take down, and monitoring (hourly charge)	1.00 HR	0.00	58.09	5.08	63.17
216. Dehumidifier (per 24 hour period) - No monitoring	5.00 EA	0.00	51.63	22.59	280.74
<i>1 machine for 5 days</i>					
217. Air mover (per 24 hour period) - No monitoring	5.00 EA	0.00	26.75	11.70	145.45
<i>1 machine for 5 days</i>					
Totals: Kitchen				165.70	2,059.68



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Rear Left Bedroom

Height: 8' 10"

279.69 SF Walls	94.98 SF Ceiling
374.67 SF Walls & Ceiling	94.98 SF Floor
10.55 SY Flooring	32.50 LF Floor Perimeter
39.67 LF Ceil. Perimeter	

Window

2' 6" X 4' 7"

Opens into Exterior

Window

2' 6" X 4' 7"

Opens into Exterior

Missing Wall - Goes to Floor

4' 8" X 6' 8"

Opens into CLOSET_2

Door

2' 6" X 6' 8"

Opens into HALLWAY

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
218. Clean the walls and ceiling	374.67 SF	0.00	0.35	11.47	142.60
219. Apply odor counteractant - liquid spray	94.98 SF	0.00	0.26	2.16	26.85
220. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
221. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
222. Clean floor	94.98 SF	0.00	0.39	3.24	40.28
223. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
224. Clean window unit (per side) 10 - 20 SF	2.00 EA	0.00	14.46	2.53	31.45
225. Clean radiator unit	1.00 EA	0.00	33.77	2.95	36.72
226. Clean window blind - horizontal or vertical	24.00 SF	0.00	1.24	2.60	32.36
227. Content Manipulation charge - per hour	2.00 HR	0.00	49.02	8.58	106.62
To move contents to clean the dwelling					


Totals: Rear Left Bedroom

35.60

442.63

Closet 2

Height: 8' 10"



92.46 SF Walls	9.18 SF Ceiling
101.64 SF Walls & Ceiling	9.18 SF Floor
1.02 SY Flooring	9.32 LF Floor Perimeter
13.99 LF Ceil. Perimeter	

Missing Wall - Goes to Floor

4' 8" X 6' 8"

Opens into REAR_LEFT_BE




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Closet 2

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
228. Clean the walls and ceiling	101.64 SF	0.00	0.35	3.11	38.68
229. Clean floor	9.18 SF	0.00	0.39	0.31	3.89
230. Apply odor counteractant - liquid spray	9.18 SF	0.00	0.26	0.21	2.60
Totals: Closet 2				3.63	45.17
Total: 1st Floor				600.13	7,458.74

Basement



Hallway

Height: 8'

377.89 SF Walls	97.14 SF Ceiling
475.03 SF Walls & Ceiling	97.14 SF Floor
10.79 SY Flooring	46.42 LF Floor Perimeter
51.33 LF Ceil. Perimeter	

Door	2' 5" X 6' 8"	Opens into HEAT_VENT_
Door	2' 6" X 6' 8"	Opens into REAR_LEFT_ST
Missing Wall	3' 3" X 8'	Opens into HALLWAY_1
Missing Wall	7' 7" X 8'	Opens into KITCHEN

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
231. Tear out wet drywall, cleanup, bag for disposal	97.14 SF	0.99	0.00	8.41	104.58
232. Clean floor or roof joist system	97.14 SF	0.00	0.92	7.82	97.19
233. Seal floor or ceiling joist system (shellac)	97.14 SF	0.00	1.40	11.90	147.90
234. HEPA Vacuuming - Detailed - (PER SF)	97.14 SF	0.00	0.67	5.69	70.77
235. Apply anti-microbial agent to more than the ceiling	194.28 SF	0.00	0.27	4.59	57.05
236. Clean the walls	377.89 SF	0.00	0.35	11.57	143.83
237. Clean door - with detail (per side)	2.00 EA	0.00	10.32	1.81	22.45
238. Clean door hardware	1.00 EA	0.00	6.38	0.56	6.94
239. Clean floor	97.14 SF	0.00	0.39	3.31	41.19
240. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Hallway

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
241. Remove Laminate - simulated wood flooring	97.14 SF	1.52	0.00	12.92	160.57
242. Tear out baseboard	46.42 LF	0.50	0.00	2.03	25.24
243. Mask and prep for paint - plastic, paper, tape (per SF)	21.00 SF	0.00	1.41	2.59	32.20
Preparations for Spray and Seal -					
<i>To seal off the rear entry way to prevent any kind of over spray that would damage the exterior facade</i>					
244. Equipment setup, take down, and monitoring (hourly charge)	1.50 HR	0.00	59.80	7.85	97.55
245. Dehumidifier (per 24 hour period) - Large - No monitoring 1 machine for 5 days	5.00 EA	0.00	71.44	31.26	388.46
246. Air mover (per 24 hour period) - No monitoring 2 machine for 5 days	10.00 EA	0.00	26.75	23.41	290.91
Totals: Hallway				136.61	1,697.89



Rear Left Storage

Height: 8'

348.00 SF Walls	115.13 SF Ceiling
463.13 SF Walls & Ceiling	115.13 SF Floor
12.79 SY Flooring	43.50 LF Floor Perimeter
46.00 LF Ceil. Perimeter	

Window

2' 8" X 1' 3"

Opens into Exterior

Door

2' 6" X 6' 8"

Opens into HALLWAY

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
247. Clean the walls and ceiling	463.13 SF	0.00	0.35	14.18	176.28
248. Apply odor counteractant - liquid spray	115.13 SF	0.00	0.26	2.62	32.55
249. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
250. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
251. Clean floor	115.13 SF	0.00	0.39	3.93	48.83
252. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Rear Left Storage

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
253. Clean window unit (per side) 3 - 9 SF	2.00 EA	0.00	10.12	1.77	22.01
254. Content Manipulation charge - per hour To move contents to clean the dwelling	2.00 HR	0.00	49.02	8.58	106.62
255. Equipment setup, take down, and monitoring (hourly charge)	0.50 HR	0.00	59.80	2.62	32.52
256. Add for HEPA filter (for neg. air machine/vacuum - Large)	1.00 EA	0.00	242.27	21.20	263.47
257. Neg. air fan/Air scrub.-Large (per 24 hr period)-No monit. 1 machine for 5 days	5.00 DA	0.00	125.88	55.07	684.47
Totals: Rear Left Storage				112.04	1,392.50



Middle Left Storage

Height: 8'


263.33 SF Walls	71.50 SF Ceiling
334.83 SF Walls & Ceiling	71.50 SF Floor
7.94 SY Flooring	32.50 LF Floor Perimeter
35.00 LF Ceil. Perimeter	

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
258. Clean the walls and ceiling	334.83 SF	0.00	0.35	10.25	127.44
259. Apply odor counteractant - liquid spray	71.50 SF	0.00	0.26	1.63	20.22
260. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
261. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
262. Clean floor	71.50 SF	0.00	0.39	2.44	30.33
263. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
264. Content Manipulation charge - per hour To move contents to clean the dwelling	0.50 HR	0.00	49.02	2.14	26.65
Totals: Middle Left Storage				18.53	230.39



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com




Bathroom

Height: 8'

171.35 SF Walls	29.64 SF Ceiling
200.99 SF Walls & Ceiling	29.64 SF Floor
3.29 SY Flooring	21.33 LF Floor Perimeter
23.50 LF Ceil. Perimeter	

Door		2' 2" X 6' 8"		Opens into HALLWAY_1	
DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
265. Clean part of the walls	115.32 SF	0.00	0.35	3.53	43.89
266. Apply odor counteractant - liquid spray	29.64 SF	0.00	0.26	0.67	8.38
267. Clean door - with detail (per side)	1.00 EA	0.00	10.32	0.90	11.22
268. Clean door hardware	0.50 EA	0.00	6.38	0.28	3.47
269. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
270. Clean ceramic tile	85.68 SF	0.00	0.51	3.82	47.52
271. Clean bath accessory	2.00 EA	0.00	6.82	1.19	14.83
272. Clean bathroom fixtures	1.00 EA	0.00	81.32	7.12	88.44
273. Clean floor - tile	29.64 SF	0.00	0.56	1.45	18.05
274. Clean toilet seat	1.00 EA	0.00	4.53	0.40	4.93
275. Clean vanity - inside and out	2.00 LF	0.00	12.67	2.22	27.56
276. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
277. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
278. Clean medicine cabinet	1.00 EA	0.00	13.50	1.18	14.68
279. Clean shower door	2.00 EA	0.00	17.08	2.99	37.15
Totals: Bathroom				28.54	354.84



Kitchen

Height: 8'

123.33 SF Walls	29.07 SF Ceiling
152.40 SF Walls & Ceiling	29.07 SF Floor
3.23 SY Flooring	15.42 LF Floor Perimeter
15.42 LF Ceil. Perimeter	

Missing Wall

7' 7" X 8'

Opens into HALLWAY



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com


CONTINUED - Kitchen

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
280. Clean range hood	1.00 EA	0.00	16.26	1.42	17.68
281. Apply odor counteractant - liquid spray	29.07 SF	0.00	0.26	0.66	8.22
282. Clean floor - tile	29.07 SF	0.00	0.56	1.42	17.70
283. Clean range - interior and exterior	1.00 EA	0.00	40.90	3.58	44.48
284. Clean countertop	8.00 SF	0.00	0.71	0.50	6.18
285. Clean the walls and ceiling	152.40 SF	0.00	0.35	4.67	58.01
286. Clean cabinetry - lower - inside and out	6.00 LF	0.00	14.13	7.42	92.20
287. Clean cabinetry - upper - inside and out	4.00 LF	0.00	14.13	4.95	61.47
288. Clean sink	1.00 EA	0.00	12.48	1.09	13.57
289. Clean sink faucet	1.00 EA	0.00	9.28	0.81	10.09
290. Clean light fixture - fluorescent	1.00 EA	0.00	13.51	1.18	14.69
291. Remove Laminate - simulated wood flooring	29.07 SF	1.52	0.00	3.87	48.06
292. Tear out baseboard	15.42 LF	0.50	0.00	0.67	8.38
293. Mask and prep for paint - plastic, paper, tape (per SF)	76.00 SF	0.00	1.41	9.38	116.54

Preparations for Spray and Seal -

To protect the kitchen cabinets from any over spray from the demo/spray and seal in the hallway

Totals: Kitchen	41.62	517.27
-----------------	-------	--------



Front Storage

Height: 8'

256.67 SF Walls	111.67 SF Ceiling
368.33 SF Walls & Ceiling	111.67 SF Floor
12.41 SY Flooring	32.50 LF Floor Perimeter
32.50 LF Ceil. Perimeter	

Missing Wall

10' X 8'

Opens into HALLWAY_1

Window

2' 8" X 1' 3"

Opens into Exterior

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
294. Clean the walls and ceiling	368.33 SF	0.00	0.35	11.28	140.20




NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y. 11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

CONTINUED - Front Storage

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
295. Apply odor counteractant - liquid spray	111.67 SF	0.00	0.26	2.54	31.57
296. Clean floor	111.67 SF	0.00	0.39	3.81	47.36
297. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
298. Clean window unit (per side) 3 - 9 SF	2.00 EA	0.00	10.12	1.77	22.01
299. Remove Laminate - simulated wood flooring	111.67 SF	1.52	0.00	14.85	184.59
300. Tear out baseboard	32.50 LF	0.50	0.00	1.42	17.67
301. Content Manipulation charge - per hour	0.50 HR	0.00	49.02	2.14	26.65
<i>To move and replace contents to pull the laminate flooring and clean the dwelling</i>					
302. Equipment setup, take down, and monitoring (hourly charge)	0.50 HR	0.00	59.80	2.62	32.52
303. Add for HEPA filter (for neg. air machine/vacuum - Large)	1.00 EA	0.00	242.27	21.20	263.47
304. Neg. air fan/Air scrub.-Large (per 24 hr period)-No monit. 1 machine for 5 days	5.00 DA	0.00	125.88	55.07	684.47
Totals: Front Storage				117.59	1,461.57



Stairs

Height: 12' 6"

3.22 SF Walls & Ceiling
 0.67 SY Flooring

3.22 SF Ceiling
 6.04 SF Floor

Missing Wall

2' 5" X 12' 6"

Opens into HALLWAY_1

Missing Wall

1' 4" X 12' 6"

Opens into HALLWAY_1

Missing Wall

1' 4" X 12' 6"

Opens into HALLWAY_1




NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com

CONTINUED - Stairs

Subroom: Stairs1 (2)

Height: 11' 5"



42.66 SF Walls	5.19 SF Ceiling
47.84 SF Walls & Ceiling	5.19 SF Floor
0.58 SY Flooring	3.75 LF Floor Perimeter
3.75 LF Ceil. Perimeter	

Missing Wall

2' 5" X 11' 4 1/2"

Opens into STAIRS

Missing Wall

9" X 11' 4 1/2"

Opens into HALLWAY_1


Missing Wall

2' 3" X 11' 4 1/2"

Opens into STAIRS2

Subroom: Stairs2 (1)

Height: 11' 5"



49.88 SF Walls	11.81 SF Ceiling
61.69 SF Walls & Ceiling	22.08 SF Floor
2.45 SY Flooring	6.17 LF Floor Perimeter
5.25 LF Ceil. Perimeter	

Missing Wall

2' 3" X 11' 4 1/2"

Opens into STAIRS1

Missing Wall

5' 3" X 11' 4 1/2"

Opens into HALLWAY_1

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
305. Clean the walls and ceiling	112.75 SF	0.00	0.35	3.45	42.91
306. Apply odor counteractant - liquid spray	33.31 SF	0.00	0.26	0.76	9.42
307. Clean stair riser - per side - per LF	24.00 LF	0.00	0.53	1.11	13.83
308. Clean stair stringer - per side	16.00 LF	0.00	0.85	1.19	14.79
309. Clean stair tread - per side - per LF	24.00 LF	0.00	0.63	1.32	16.44
310. Clean handrail - wall mounted	8.00 LF	0.00	0.51	0.36	4.44
311. Mask and prep for paint - plastic, paper, tape (per SF)	33.31 SF	0.00	1.41	4.11	51.08
Preparations for Spray and Seal -					


To protect the floor

Totals: Stairs				12.30	152.91
----------------	--	--	--	-------	--------



NY American Emergency Service

P.O.Box 140481 Station B
Jamaica N.Y. 11414
Office 718-659-4800
Fax 718-659-6716
Tax ID # 47-4224169
americanemergencyservice@gmail.com



Hallway 1

Height: 8'

255.56 SF Walls	112.42 SF Ceiling
367.98 SF Walls & Ceiling	112.42 SF Floor
12.49 SY Flooring	31.17 LF Floor Perimeter
35.83 LF Ceil. Perimeter	

Door	2' 6" X 6' 8"	Opens into MIDDLE_LEFT_
Missing Wall	3' 3" X 8'	Opens into HALLWAY
Door	2' 2" X 6' 8"	Opens into BATHROOM
Missing Wall	5' 3" X 8'	Opens into STAIRS2
Missing Wall	1' 4" X 8'	Opens into STAIRS
Missing Wall	2' 5" X 8'	Opens into STAIRS
Missing Wall	1' 4" X 8'	Opens into STAIRS
Missing Wall	9" X 8'	Opens into STAIRS1
Missing Wall	10' X 8'	Opens into FRONT_STORAGE

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
312. Tear out wet drywall, cleanup, bag for disposal	112.42 SF	0.99	0.00	9.74	121.04
313. Clean floor or roof joist system	112.42 SF	0.00	0.92	9.05	112.48
314. Seal floor or ceiling joist system (shellac)	112.42 SF	0.00	1.40	13.77	171.16
315. HEPA Vacuuming - Detailed - (PER SF)	112.42 SF	0.00	0.67	6.59	81.91
316. Apply anti-microbial agent to more than the ceiling	224.85 SF	0.00	0.27	5.31	66.02
317. Clean the walls	255.56 SF	0.00	0.35	7.83	97.28
318. Clean floor	112.42 SF	0.00	0.39	3.84	47.68
319. Clean light fixture	1.00 EA	0.00	10.17	0.89	11.06
320. Remove Laminate - simulated wood flooring	112.42 SF	1.52	0.00	14.95	185.83
321. Tear out baseboard	31.17 LF	0.50	0.00	1.36	16.95
322. Equipment setup, take down, and monitoring (hourly charge)	1.50 HR	0.00	59.80	7.85	97.55
323. Dehumidifier (per 24 hour period) - Large - No monitoring	5.00 EA	0.00	71.44	31.26	388.46
1 machine for 5 days					
324. Air mover (per 24 hour period) - No monitoring	10.00 EA	0.00	26.75	23.41	290.91
2 machine for 5 days					



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y.11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

CONTINUED - Hallway 1

DESCRIPTION	QTY	REMOVE	REPLACE	TAX	TOTAL
Totals: Hallway 1				135.85	1,688.33
Total: Basement				603.08	7,495.70
Line Item Totals: 39-11-27TH_MIT-DEMO				1,915.35	23,805.27

Grand Total Areas:

6,959.62 SF Walls	1,954.25 SF Ceiling	8,913.87 SF Walls and Ceiling
1,993.80 SF Floor	221.53 SY Flooring	777.61 LF Floor Perimeter
0.00 SF Long Wall	0.00 SF Short Wall	917.41 LF Ceil. Perimeter
1,993.80 Floor Area	2,170.76 Total Area	6,659.97 Interior Wall Area
3,017.90 Exterior Wall Area	327.50 Exterior Perimeter of Walls	
0.00 Surface Area	0.00 Number of Squares	0.00 Total Perimeter Length
0.00 Total Ridge Length	0.00 Total Hip Length	



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y.11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

Summary for Dwelling

Line Item Total	21,889.92
Total Tax(Rep-Maint)	1,915.35
Replacement Cost Value	\$23,805.27
Net Claim	\$23,805.27

Anthony



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y.11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

Recap of Taxes

	Total Tax(Rep- Maint) (8.75%)	Clothing Local Tax (4.75%)	Clothing State Tax (4%)	Manuf. Home Tax (8.75%)	Storage Rental Tax (8.75%)
Line Items	1,915.35	0.00	0.00	0.00	0.00
Total	1,915.35	0.00	0.00	0.00	0.00



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y. 11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

Recap by Room

Estimate: 39-11-27TH_MIT-DEMO	1,118.10	5.11%
Area: 2nd Floor		
Living Room	1,340.46	6.12%
Kitchen	660.07	3.02%
Dining Room	263.34	1.20%
Closet 1	48.33	0.22%
Hallway	94.57	0.43%
Rear Left Bedroom	2,868.57	13.10%
Closet 2	341.96	1.56%
Closet 3	466.54	2.13%
Closet 4	322.17	1.47%
Bathroom	389.94	1.78%
Closet 5	41.40	0.19%
Landing	105.32	0.48%
Stairway	77.92	0.36%
Area Subtotal: 2nd Floor	7,020.59	32.07%
Area: 1st Floor		
Entry	161.64	0.74%
1st Floor Common Hallway	240.55	1.10%
Stairs	272.64	1.25%
Living Room	1,511.72	6.91%
Closet 1	38.50	0.18%
Front bedroom	1,608.00	7.35%
Hallway	384.56	1.76%
Bathroom	298.45	1.36%
Kitchen	1,893.98	8.65%
Rear Left Bedroom	407.03	1.86%
Closet 2	41.54	0.19%
Area Subtotal: 1st Floor	6,858.61	31.33%
Area: Basement		
Hallway	1,561.28	7.13%
Rear Left Storage	1,280.46	5.85%
Middle Left Storage	211.86	0.97%
Bathroom	326.30	1.49%
Kitchen	475.65	2.17%
Front Storage	1,343.98	6.14%
Stairs	140.61	0.64%



NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y.11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com

Hallway 1	1,552.48	7.09%
Area Subtotal: Basement	6,892.62	31.49%
Subtotal of Areas	21,889.92	100.00%
Total	21,889.92	100.00%




NY American Emergency Service

P.O.Box 140481 Station B
 Jamaica N.Y.11414
 Office 718-659-4800
 Fax 718-659-6716
 Tax ID # 47-4224169
 americanemergencyservice@gmail.com


Recap by Category

Items	Total	%
CLEANING	7,183.10	30.17%
CONTENT MANIPULATION	637.25	2.68%
GENERAL DEMOLITION	3,048.40	12.81%
PAINTING	2,747.79	11.54%
WATER EXTRACTION & REMEDIATION	8,273.38	34.75%
Subtotal	21,889.92	91.95%
Total Tax(Rep-Maint)	1,915.35	8.05%
Total	23,805.27	100.00%

This is a final bill, subject to change upon the insurance companies final inspection. Please feel free to contact us with any questions or concerns.

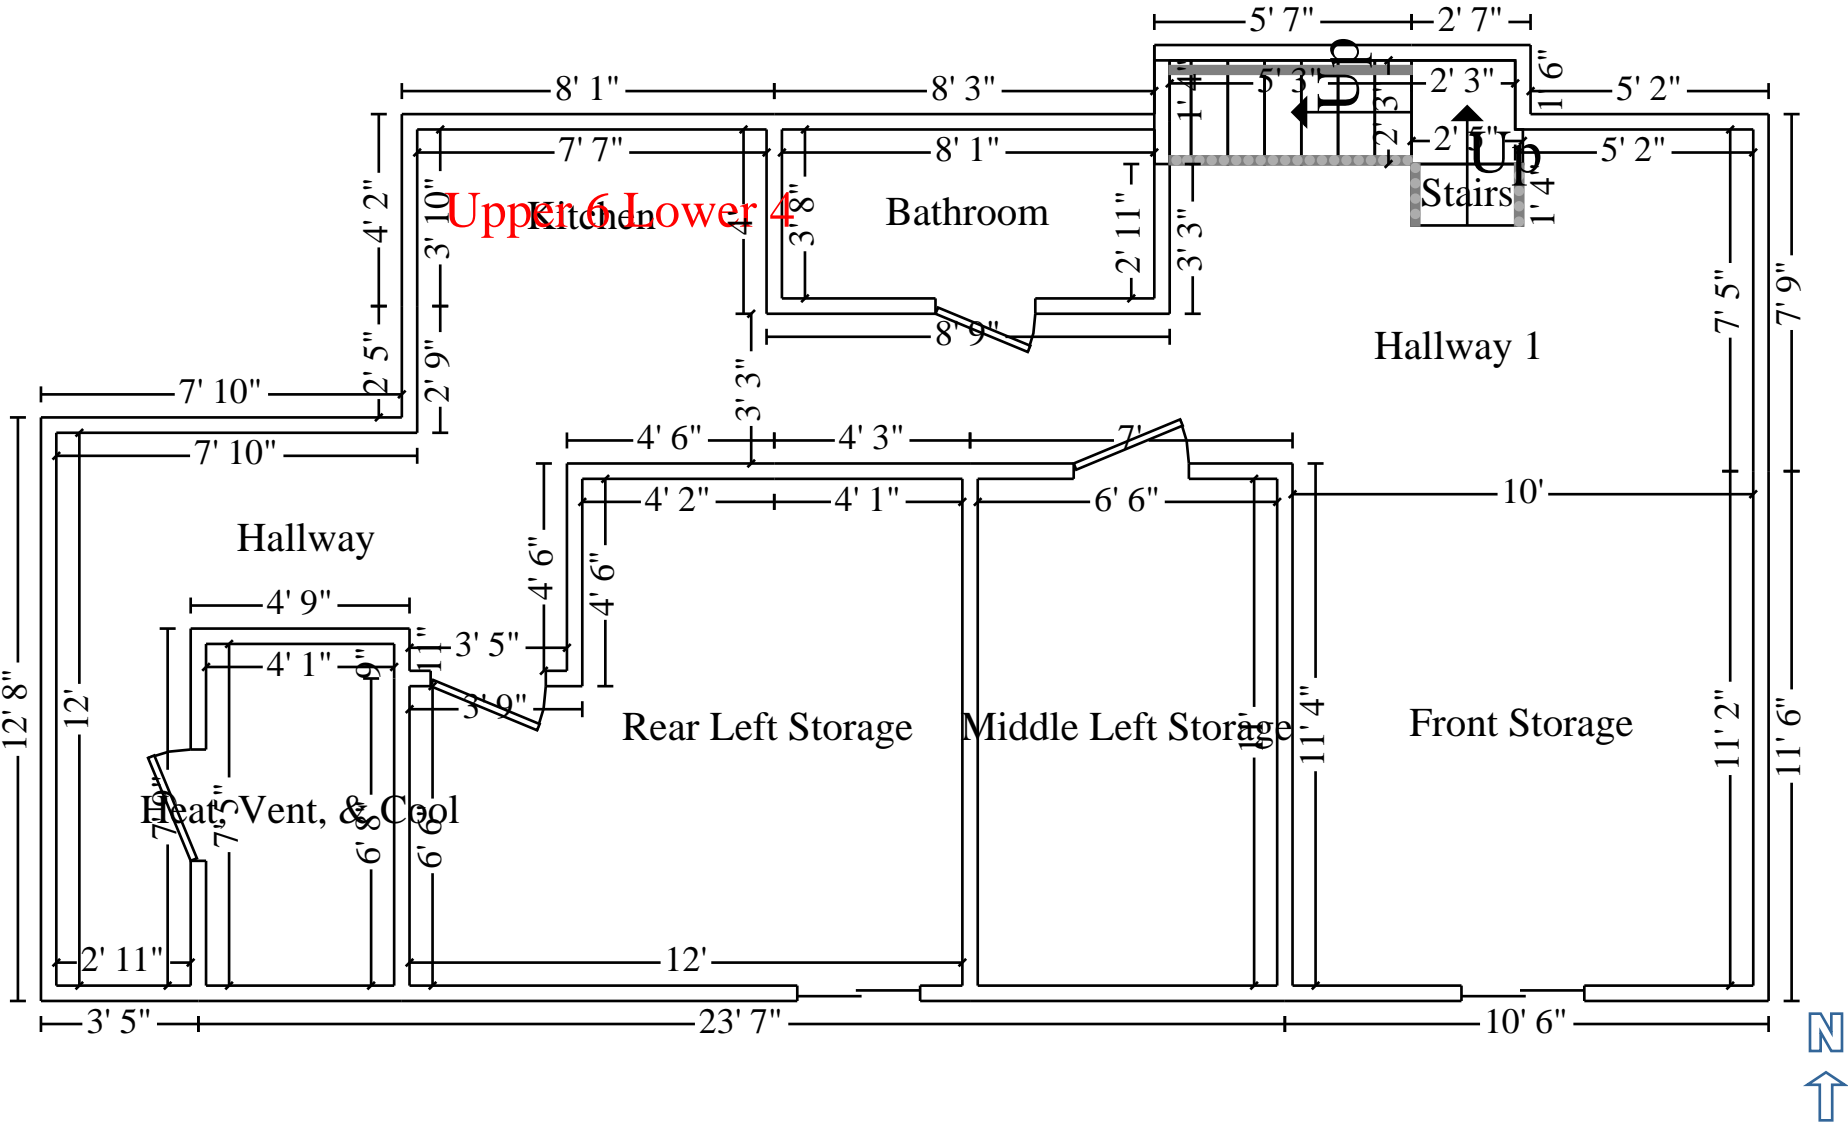

Basement

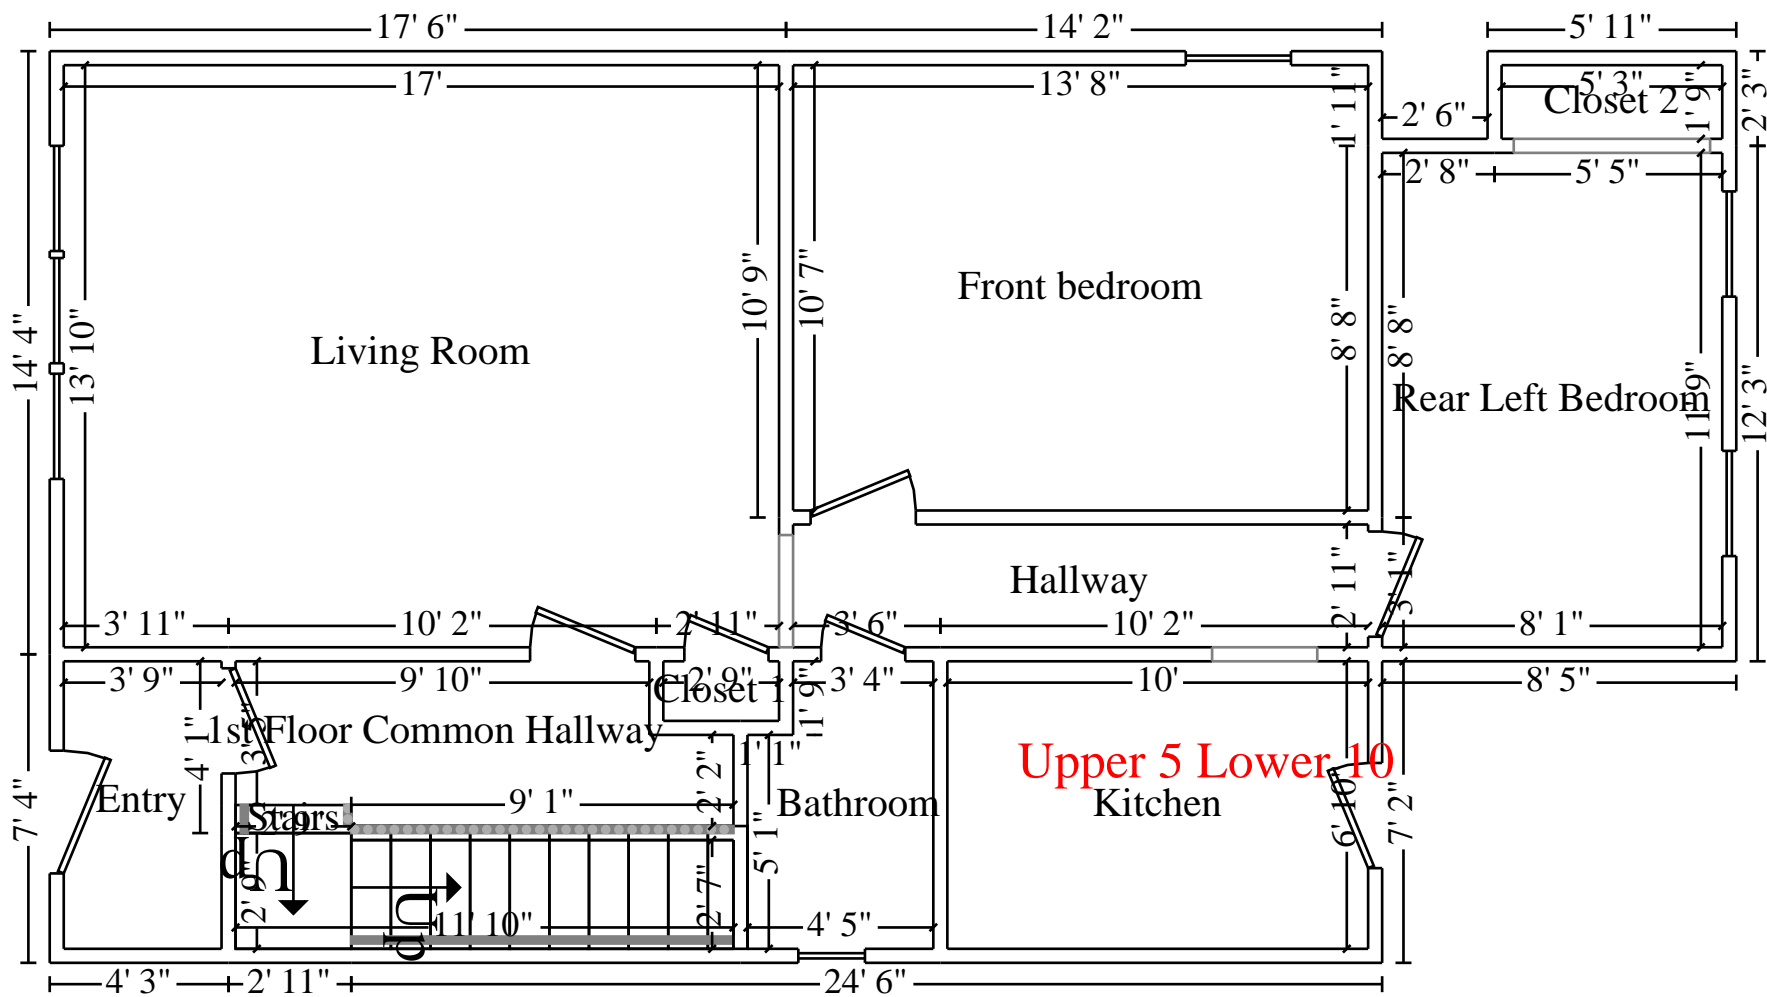

1st Floor

